


PIPE SUPPORT

CARRIER PIPE (NB)	HI-GARD DESIGNATION NO.	MAX. SAFE- TY LOAD (kg)	BOLT SIZE d	B (mm)	C (mm)	STEEL PLATE SIZE				BOLT SIZE E
						S ₁ (mm)	t ₁ (mm)	S ₂ (mm)	t ₂ (mm)	
(mm) (in) 15 1/2	H G 15/ 75	300	3/8"	120	46	25	4. ^s	25	4. ^s	3/8"
	H G 15/100	300	3/8"	125	59	25	4. ^s	25	4. ^s	3/8"
	H G 15/125	300	3/8"	150	72	25	4. ^s	25	4. ^s	3/8"
20 3/4	H G 20/ 75	300	3/8"	120	46	25	4. ^s	25	4. ^s	3/8"
	H G 20/100	300	3/8"	125	59	25	4. ^s	25	4. ^s	3/8"
	H G 20/125	300	3/8"	150	72	25	4. ^s	25	4. ^s	3/8"
25 1	H G 25/ 75	300	3/8"	120	46	25	4. ^s	25	4. ^s	3/8"
	H G 25/100	300	3/8"	125	59	25	4. ^s	25	4. ^s	3/8"
	H G 25/150	300	3/8"	165	85	25	4. ^s	25	4. ^s	3/8"
32 1 1/4	H G 32/100	300	3/8"	125	59	25	4. ^s	25	4. ^s	3/8"
	H G 32/125	300	3/8"	150	72	25	4. ^s	25	4. ^s	3/8"
	H G 32/150	300	3/8"	165	85	25	4. ^s	25	4. ^s	3/8"
40 1 1/2	H G 40/100	300	3/8"	125	59	38	4. ^s	38	4. ^s	3/8"
	H G 40/125	300	3/8"	150	72	38	4. ^s	38	4. ^s	3/8"
	H G 40/150	300	3/8"	165	85	38	4. ^s	38	4. ^s	3/8"
50 2	H G 50/100	300	3/8"	125	59	50	4. ^s	50	4. ^s	3/8"
	H G 50/125	300	3/8"	150	72	50	4. ^s	50	4. ^s	3/8"
	H G 50/160	300	3/8"	170	88	50	4. ^s	50	4. ^s	3/8"
65 2 1/2	H G 65/125	500	1/2"	150	72	75	4. ^s	75	4. ^s	3/8"
	H G 65/150	500	1/2"	165	85	75	4. ^s	75	4. ^s	3/8"
	H G 65/175	500	1/2"	175	96	75	4. ^s	75	4. ^s	3/8"
80 3	H G 80/125	500	1/2"	150	72	75	4. ^s	75	4. ^s	3/8"
	H G 80/150	500	1/2"	165	85	75	4. ^s	75	4. ^s	3/8"
	H G 80/200	500	1/2"	200	110	75	4. ^s	75	4. ^s	3/8"
100 4	H G 100/160	650	5/8"	170	88	125	6. ⁰	125	6. ⁰	1/2"
	H G 100/175	650	5/8"	175	96	125	6. ⁰	125	6. ⁰	1/2"
	H G 100/215	650	5/8"	205	116	125	6. ⁰	125	6. ⁰	1/2"
125 5	H G 125/225	650	5/8"	210	123	125	6. ⁰	125	6. ⁰	1/2"
	H G 125/250	650	5/8"	230	137	125	6. ⁰	125	6. ⁰	1/2"
	H G 125/300	650	5/8"	275	163	125	6. ⁰	125	6. ⁰	1/2"
150 6	H G 150/250	880	3/4"	230	137	200	6. ⁰	200	6. ⁰	5/8"
	H G 150/275	880	3/4"	250	148	200	6. ⁰	200	6. ⁰	5/8"
	H G 150/315	880	3/4"	280	169	200	6. ⁰	200	6. ⁰	5/8"
200 8	H G 200/300	910	1"	275	165	300	6. ⁰	300	6. ⁰	5/8"
	H G 200/315	910	1"	280	171	300	6. ⁰	300	6. ⁰	5/8"
	H G 200/400	910	1"	380	216	300	6. ⁰	300	6. ⁰	5/8"
250 10	H G 250/350	1,650	1"	315	193	400	9. ⁰	400	9. ⁰	3/4"
	H G 250/400	1,650	1"	380	219	400	9. ⁰	400	9. ⁰	3/4"
	H G 250/425	1,650	1"	390	231	400	9. ⁰	400	9. ⁰	3/4"
300 12	H G 300/400	1,750	1"	380	219	400	9. ⁰	400	9. ⁰	3/4"
	H G 300/425	1,750	1"	390	231	400	9. ⁰	400	9. ⁰	3/4"
	H G 300/500	1,750	1"	435	269	400	9. ⁰	400	9. ⁰	3/4"

U-CLAMP

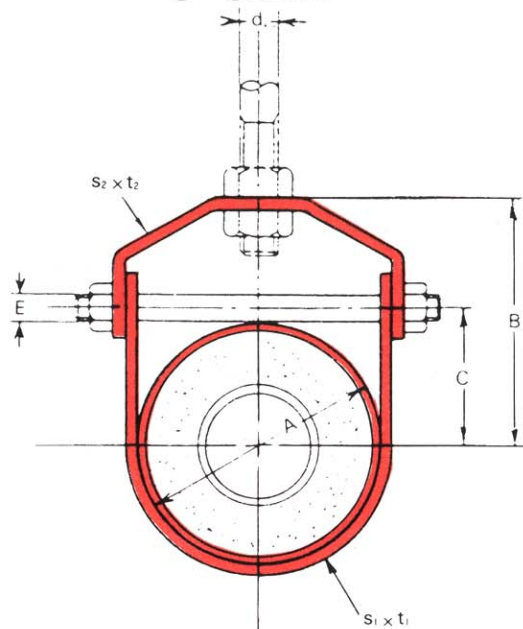

MAX. TEMPERATURE: 350°C
MATERIAL: SS41



Note : Kindly contact Ricwil or their respective agent for information if pipe diameter larger than 300 mm.