


PIPE SUPPORT

RISER CLAMP (LIGHT WEIGHT)

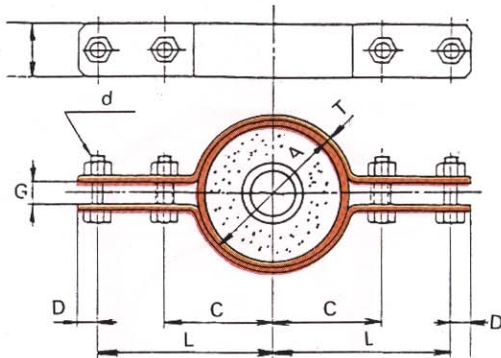

DESIGNATION AND MAX. TEMPERATURE

L-1 350°C

L-2 565°C

L-3 700°C

USAGE: FOR RISER PIPING

MATERIAL: L-1 SS41

L-2 A387Gr22, SCM435

L-3 SUS304

CARRIER PIPE (NB)	HI-GARD DESIGNATION NO.	L (mm)	A (mm)	C (mm)	D (mm)	G (mm)	S (mm)	T (mm)	BOLT SIZE d
(mm) (in)	HG 15/ 75	225	75	70	25	32	75	9	3/4"
15 1/2	HG 15/100	225	102	100	25	32	75	9	3/4"
	HG 15/125	225	127	110	25	32	75	9	3/4"
	HG 20/ 75	225	75	70	25	32	75	9	3/4"
20 3/4	HG 20/100	225	102	100	25	32	75	9	3/4"
	HG 20/125	225	127	110	25	32	75	9	3/4"
	HG 25/ 75	225	75	70	25	32	75	9	3/4"
25 1	HG 25/100	225	102	100	25	32	75	9	3/4"
	HG 25/150	250	152	125	30	40	75	12	1"
	HG 32/100	225	102	100	25	32	75	9	3/4"
32 1-1/4	HG 32/125	225	127	110	25	32	75	9	3/4"
	HG 32/150	250	152	125	30	40	75	12	1"
	HG 40/100	225	102	100	25	32	75	9	3/4"
40 1-1/2	HG 40/125	225	127	110	25	32	75	9	3/4"
	HG 40/150	250	152	125	30	40	75	12	1"
	HG 50/100	225	102	100	25	32	75	9	3/4"
50 2	HG 50/125	225	127	110	25	32	75	9	3/4"
	HG 50/160	250	160	125	30	40	75	12	1"
	HG 65/125	225	127	110	25	32	75	9	3/4"
65 2-1/2	HG 65/150	250	152	125	30	40	75	12	1"
	HG 65/175	250	175	130	30	40	75	12	1"
	HG 80/125	225	127	110	25	32	75	9	3/4"
80 3	HG 80/150	250	152	125	30	40	75	12	1"
	HG 80/200	250	203	155	30	40	75	12	1"
	HG 100/160	250	160	125	30	40	75	12	1"
100 4	HG 100/175	250	175	130	30	40	75	12	1"
	HG 100/215	300	216	165	30	40	100	12	1"
	HG 125/225	300	225	165	30	40	100	12	1"
125 5	HG 125/250	300	254	185	30	40	100	12	1"
	HG 125/300	400	305	220	35	50	125	16	1-1/4"
	HG 150/250	300	254	185	30	40	100	12	1"
150 6	HG 150/275	350	275	200	30	40	125	12	1"
	HG 150/315	400	318	230	35	50	125	16	1-1/4"
	HG 200/300	400	305	220	35	50	125	16	1-1/4"
200 8	HG 200/315	400	318	230	35	50	125	16	1-1/4"
	HG 200/400	450	406	280	35	50	150	16	1-1/4"
	HG 250/350	400	356	255	35	50	125	16	1-1/4"
250 10	HG 250/400	450	406	280	35	50	150	16	1-1/4"
	HG 250/425	450	432	290	35	50	150	16	1-1/4"
	HG 300/400	450	406	280	35	50	150	16	1-1/4"
300 12	HG 300/425	450	432	290	35	50	150	16	1-1/4"
	HG 300/500	550	508	350	40	50	150	19	1-1/2"



Note : Kindly contact Ricwil or their respective agent for information if pipe diameter larger than 300 mm.